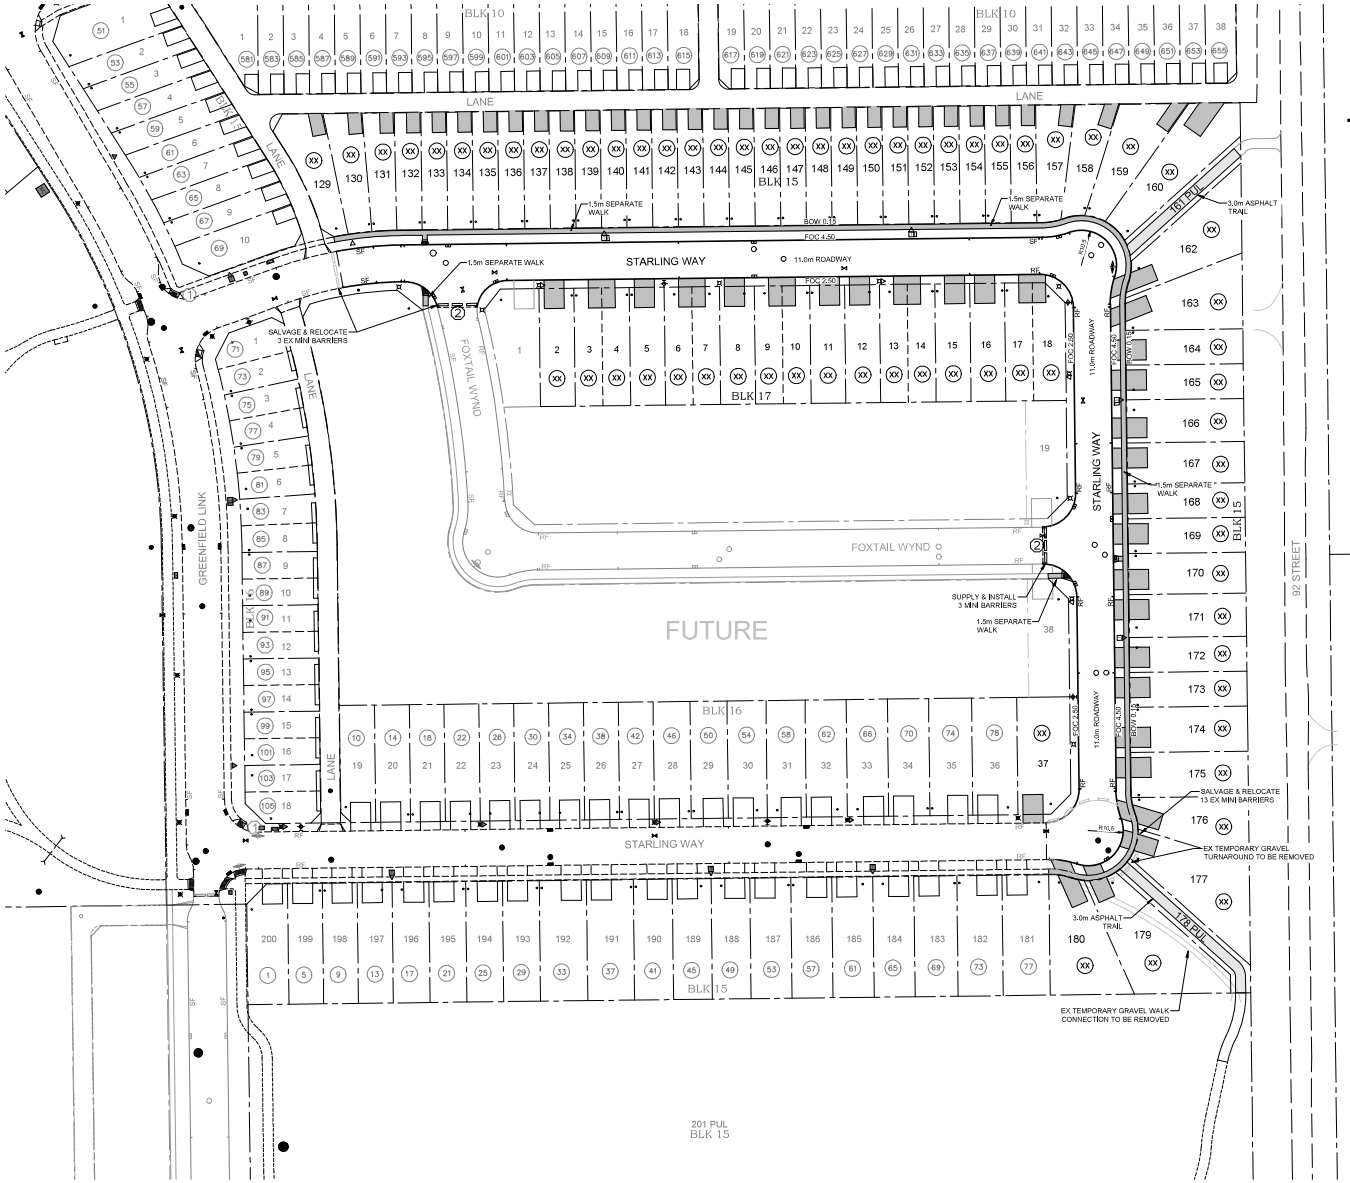

ASPHALT STRUCTURES

LOCAL ROADWAYS
- 35mm 10mm LT ASPHALT (SURFACE LIFT)
- 65mm 10mm LT ASPHALT (BASE LIFT)
- 200mm 20mm GRANULAR BASE COURSE
- 150mm SUBGRADE PREP WITH 10kg/m^2 OF CEMENT STABILIZATION

ASPHALT TRAILS
- 75mm 10mm LT ASPHALT
- 150mm 20mm GRANULAR BASE COURSE
- 150mm SUBGRADE PREP WITH 10kg/m^2 OF CEMENT STABILIZATION

TRAFFIC SIGNAGE

- TO CITY OF FORT SASKATCHEWAN STANDARDS
- STREET BLADES TO BE INSTALLED POINTING TOWARDS THE STREET THEY ARE MARKING

(1) STOP SIGN (RA-1)
(2) CHECKERBOARD SIGN (WA-8)

FENCING

- SEE THE LANDSCAPING PLANS PREPARED BY CLASSIC LANDSCAPES FOR FENCING LOCATIONS AND DETAILS.

NOTES

- NO DRIVEWAYS WITHIN 1.5m OF STREET FURNITURE.
- CURB TRANSITION LOCATIONS SHOWN AS: SF ➔ RF.

SIGNAGE

- FOR MR/PUL TRAIL SIGNAGE AND DETAILS SEE THE LANDSCAPING PLANS PREPARED BY CLASSIC LANDSCAPES.
- ALL SIGNS TO BE SECURED TO EXISTING SUPPORTS WHERE POSSIBLE. IF A POST IS REQUIRED IT IS TO BE PER SECTION G14.1.1.c OF THE FORT SASKATCHEWAN STANDARDS.



SIGN POST DETAIL

LEGEND

EXISTING / PROPOSED / FUTURE
- PROPERTY LINE
- RIGHT OF WAY LINE
- CURB AND GUTTER
- SEPARATE WALK
- ASPHALT TRAIL
- CONCRETE SWALE
- (45) STREET ADDRESS
- (2) STREET SIGNS
- (XX)

EXISTING / PROPOSED
- VALVE
- HYDRANT
- MANHOLE
- CURB STOP
- CATCH BASIN
- TRANSFORMER
- PEDESTAL
- LIGHT STANDARD
- POWER POLES
- MAILBOX
- T-BOLLARDS

EXISTING / PROPOSED
- DRIVEWAY LOCATION

NO.	REVISION	DATE	BY
1.	1st SUBMISSION FOR CITY/CLIENT REVIEW	MAY 13/22	NAS

5 0 10 20 30

Al-Terra Engineering Ltd.

ROAD OVERALL, STREET FURNITURE, & ADDRESSING PLAN

DESIGN:	NAS	CHECKED:	NAS	JOB NO:	666-066
DRAWN BY:	VM	APPROVED:	KBA	DRAWING NO.	
SCALE:	1:750	DATE:	MAY 2022		666-066-G4

SOUTHFORT MEADOWS
STAGE 8
IN
SOUTHFORT
BY
SOUTHFORT DEVELOPMENT CORP.

CITY OF FORT SASKATCHEWAN